

AGRICULTURAL

GRAIN STORAGE SYSTEMS



Bins, hoppers and drying equipment you can build on.



MFS / YORK / STORMOR

A Division of **GLOBAL** Industries, Inc.

GRAIN STORAGE BINS

A smart investment—built to last.

As a grain producer, you see risks and opportunities every day. Our goal at MFS/YORK/STORMOR is to help you turn those risks into opportunities—and we know of no better investment than a grain storage system that you can depend on.

With MFS/YORK/STORMOR you get the engineering, construction standards, flexibility and reliability you demand—all from a company that has specialized in grain storage and grain handling for decades.

We build strength, durability and value into every grain bin and storage system—and we design them to be safe and easy to use under even the most demanding conditions.

Our grain storage systems are working around the world, helping to maintain grain quality and to improve marketing options and profitability. When it comes to grain storage and handling, there is no better choice than MFS/YORK/STORMOR. ▀

All galvanized construction ensures long life.



Improving your options with quality construction and expert planning.

Our philosophy at MFS/YORK/STORMOR is to build your grain storage system to last. But when the time is right, you need to be in the right position to add to your storage capacity—and to do it efficiently.

That's why our bin quality and dealer network are so important. Your local MFS/YORK/STORMOR dealer has the training and experience necessary to help you plan for future growth and expansion.



Performance-tested 2.66" corrugation steel on all MFS/YORK/STORMOR bins withstands the test of time.

MFS/YORK/STORMOR has more than 90 bin sizes to choose from in its agricultural line, with bin capacities from 1,000 bushels to more than 100,000 bushels.

Of course there's more to a quality grain storage system than just size. MFS/YORK/STORMOR manufactures three grades of bins to match your specific needs—each of them constructed with galvanized 2.66" corrugation steel to protect against the most extreme conditions.

- ▶ **Heavy Duty Bins:** Engineered for seismic loads, long-term storage, re-circulation, drying, concrete hopper bottoms and commercial applications.
- ▶ **Drying Bins:** Specially designed for grain storage and drying.
- ▶ **Storage Bins:** Cost-effective, quality constructed for storing pre-dried grain.

MFS/YORK/STORMOR engineers its agricultural bins for ease of construction without the use of bin stiffener columns. For larger capacity bins, see our commercial storage line of stiffened bins. ▀



Our specially designed conical neoprene seal seats the bolt firmly in the panels.



MFS BIN SPECIFICATIONS

Model	Max Cap (bushels)	Level Cap (bushels)	Diameter (feet)	Diameter (meters)	Eave Height (feet)	Eave Height (meters)	Overall Height (feet)	Overall Height (meters)	M/Ton Cap Corn	M/Ton Cap (m³)
15-3	1,401	1,043	15'-0"	4.57	8'-0"	2.44	12'-3"	3.73	37	63
15-4	1,799	1,440	15'-0"	4.57	10'-8"	3.25	14'-11"	4.55	50	78
15-5	2,196	1,838	15'-0"	4.57	13'-4"	4.06	17'-7"	5.36	63	93
15-6	2,593	2,235	15'-0"	4.57	16'-0"	4.88	20'-3"	6.17	76	108
15-7	2,991	2,632	15'-0"	4.57	18'-8"	5.69	22'-11"	6.98	89	123
15-8	3,388	3,029	15'-0"	4.57	21'-4"	6.51	25'-7"	7.79	102	138
15-9	3,785	3,427	15'-0"	4.57	24'-0"	7.32	28'-3"	8.61	115	153
15-10	4,182	3,824	15'-0"	4.57	26'-8"	8.13	30'-11"	9.42	128	168
18-4	2,647	2,074	18'-0"	5.48	10'-8"	3.25	15'-10"	4.83	63	88
18-5	3,219	2,646	18'-0"	5.48	13'-4"	4.06	18'-6"	5.64	78	107
18-6	3,791	3,218	18'-0"	5.48	16'-0"	4.88	21'-2"	6.45	93	126
18-7	4,363	3,790	18'-0"	5.48	18'-8"	5.69	23'-10"	7.26	108	145
18-8	4,935	4,362	18'-0"	5.48	21'-4"	6.51	26'-6"	8.08	123	164
18-9	5,507	4,935	18'-0"	5.48	24'-0"	7.32	29'-2"	8.89	138	183
18-10	6,080	5,507	18'-0"	5.48	26'-8"	8.13	31'-10"	9.71	153	202
18-11	6,652	6,079	18'-0"	5.48	29'-4"	8.94	34'-6"	10.52	168	221
18-12	7,224	6,651	18'-0"	5.48	32'-0"	9.75	37'-2"	11.33	183	240
21-4	3,680	2,852	21'-0"	6.41	10'-8"	3.25	16'-10"	5.13	91	121
21-5	4,459	3,631	21'-0"	6.41	13'-4"	4.06	19'-6"	5.94	111	147
21-6	5,237	4,410	21'-0"	6.41	16'-0"	4.88	22'-2"	6.76	131	173
21-7	6,016	5,188	21'-0"	6.41	18'-8"	5.69	24'-10"	7.57	151	199
21-8	6,795	5,967	21'-0"	6.41	21'-4"	6.51	27'-6"	8.38	171	225
21-9	7,573	6,746	21'-0"	6.41	24'-0"	7.32	30'-2"	9.19	191	251
21-10	8,352	7,524	21'-0"	6.41	26'-8"	8.13	32'-10"	10.01	211	277
21-11	9,131	8,303	21'-0"	6.41	29'-4"	8.94	35'-6"	10.82	231	303
21-12	9,910	9,082	21'-0"	6.41	32'-0"	9.75	38'-2"	11.63	251	329
24-4	4,907	3,687	24'-0"	7.31	10'-8"	3.25	17'-9"	5.41	123	162
24-5	5,924	4,704	24'-0"	7.31	13'-4"	4.06	20'-5"	6.22	149	196
24-6	6,941	5,721	24'-0"	7.31	16'-0"	4.88	23'-1"	7.04	175	230
24-7	7,958	6,738	24'-0"	7.31	18'-8"	5.69	25'-9"	7.85	201	264
24-8	8,976	7,755	24'-0"	7.31	21'-4"	6.51	28'-5"	8.66	227	298
24-9	9,993	8,773	24'-0"	7.31	24'-0"	7.32	31'-1"	9.47	253	332
24-10	11,010	9,790	24'-0"	7.31	26'-8"	8.13	33'-9"	10.29	279	366
24-11	12,027	10,807	24'-0"	7.31	29'-4"	8.94	36'-5"	11.09	305	400
24-12	13,044	11,824	24'-0"	7.31	32'-0"	9.75	39'-1"	11.91	331	434
24-13	14,061	13,858	24'-0"	7.31	34'-8"	10.57	41'-10"	12.75	357	467
27-4	6,338	4,666	27'-0"	8.23	10'-8"	3.25	18'-9"	5.72	158	209
27-5	7,626	5,954	27'-0"	8.23	13'-4"	4.06	21'-5"	6.53	191	252
27-6	8,913	7,241	27'-0"	8.23	16'-0"	4.88	24'-1"	7.34	224	295
27-7	10,200	8,528	27'-0"	8.23	18'-8"	5.69	26'-9"	8.15	257	338
27-8	11,487	9,815	27'-0"	8.23	21'-4"	6.51	29'-5"	8.97	290	381
27-9	12,775	11,103	27'-0"	8.23	24'-0"	7.32	32'-1"	9.78	323	424
27-10	14,062	12,390	27'-0"	8.23	26'-8"	8.13	34'-9"	10.59	356	467
27-11	15,349	13,677	27'-0"	8.23	29'-4"	8.94	37'-5"	11.41	389	510
27-12	16,636	14,965	27'-0"	8.23	32'-0"	9.75	40'-1"	12.22	422	553
27-13	17,924	16,252	27'-0"	8.23	34'-8"	10.57	42'-9"	13.03	455	596
27-14	19,211	17,539	27'-0"	8.23	37'-4"	11.38	45'-5"	13.84	488	639
30-4	7,983	5,761	30'-0"	9.14	10'-8"	3.25	19'-8"	5.99	197	264
30-5	9,572	7,350	30'-0"	9.14	13'-4"	4.06	22'-4"	6.81	238	317
30-6	11,161	8,939	30'-0"	9.14	16'-0"	4.88	25'-0"	7.62	279	370
30-7	12,750	10,529	30'-0"	9.14	18'-8"	5.69	27'-8"	8.43	320	423
30-8	14,340	12,118	30'-0"	9.14	21'-4"	6.51	30'-4"	9.25	361	476
30-9	15,929	13,707	30'-0"	9.14	24'-0"	7.32	33'-0"	10.06	402	529
30-10	17,518	15,296	30'-0"	9.14	26'-8"	8.13	35'-8"	10.87	443	582
30-11	19,107	16,886	30'-0"	9.14	29'-4"	8.94	38'-4"	11.68	484	635
30-12	20,696	18,475	30'-0"	9.14	32'-0"	9.75	41'-0"	12.49	525	688
30-13	22,286	20,064	30'-0"	9.14	34'-8"	10.57	43'-9"	13.33	566	741
30-14	23,875	21,653	30'-0"	9.14	37'-4"	11.38	46'-5"	14.15	606	794
33-4	9,850	6,971	33'-0"	10.06	10'-8"	3.25	20'-7"	6.27	257	327
33-5	11,773	8,894	33'-0"	10.06	13'-4"	4.06	23'-3"	7.09	305	391
33-6	13,696	10,817	33'-0"	10.06	16'-0"	4.88	25'-11"	7.89	353	455
33-7	15,619	12,740	33'-0"	10.06	18'-8"	5.69	28'-7"	8.71	401	519
33-8	17,542	14,663	33'-0"	10.06	21'-4"	6.51	31'-3"	9.53	449	583
33-9	19,465	16,586	33'-0"	10.06	24'-0"	7.32	33'-11"	10.34	497	647
33-10	21,387	18,509	33'-0"	10.06	26'-8"	8.13	36'-7"	11.15	545	711
33-11	23,310	20,432	33'-0"	10.06	29'-4"	8.94	39'-3"	11.96	593	775
33-12	25,233	22,355	33'-0"	10.06	32'-0"	9.75	41'-11"	12.78	641	839
33-13	27,156	24,277	33'-0"	10.06	34'-8"	10.57	44'-9"	13.64	689	903
33-14	29,079	26,200	33'-0"	10.06	37'-4"	11.38	47'-5"	14.45	738	967

Model	Max Cap (bushels)	Level Cap (bushels)	Diameter (feet)	Diameter (meters)	Eave Height (feet)	Eave Height (meters)	Overall Height (feet)	Overall Height (meters)	M/Ton Cap Corn	M/Ton Cap (m³)
36-4	11,949	8,296	36'-0"	10.97	10'-8"	3.25	21'-7"	6.58	304	398
36-5	14,237	10,584	36'-0"	10.97	13'-4"	4.06	24'-3"	7.39	362	474
36-6	16,526	12,873	36'-0"	10.97	16'-0"	4.88	26'-11"	8.21	420	550
36-7	18,814	15,161	36'-0"	10.97	18'-8"	5.69	29'-7"	9.02	478	626
36-8	21,103	17,450	36'-0"	10.97	21'-4"	6.51	32'-3"	9.83	536	702
36-9	23,391	19,738	36'-0"	10.97	24'-0"	7.32	34'-11"	10.64	594	778
36-10	25,680	22,027	36'-0"	10.97	26'-8"	8.13	37'-7"	11.46	652	854
36-11	27,968	24,315	36'-0"	10.97	29'-4"	8.94	40'-3"	12.27	710	930
36-12	30,257	26,604	36'-0"	10.97	32'-0"	9.75	42'-11"	13.08	768	1,006
36-13	32,545	28,892	36'-0"	10.97	34'-8"	10.57	45'-8"	13.92	826	1,082
36-14	34,834	31,181	36'-0"	10.97	37'-4"	11.38	48'-4"	14.73	884	1,158
42-4	16,882	11,291	42'-0"	12.81	10'-8"	3.25	22'-8"	6.91	429	557
42-5	19,996	14,406	42'-0"	12.81	13'-4"	4.06	25'-4"	7.72	508	661
42-6	23,111	17,521	42'-0"	12.81	16'-0"	4.88	28'-0"	8.53	587	765
42-7	26,226	20,636	42'-0"	12.81	18'-8"	5.69	30'-8"	9.35	666	869
42-8	29,341	23,751	42'-0"	12.81	21'-4"	6.51	33'-4"	10.16	745	973
42-9	32,456	26,866	42'-0"	12.81	24'-0"	7.32	36'-0"	10.97	824	1,077
42-10	35,571	29,981	42'-0"	12.81	26'-8"	8.13	38'-8"	11.79	903	1,181
42-11	38,686	33,096	42'-0"	12.81	29'-4"	8.94	41'-4"	12.59	982	1,285
42-12	41,801	36,211	42'-0"	12.81	32'-0"	9.75	44'-0"	13.41	1,061	1,389
42-13	44,916	39,326	42'-0"	12.81	34'-8"	10.57	46'-8"	14.22	1,140	1,493
42-14	48,030	42,440	42'-0"	12.81	37'-4"	11.38	49'-4"	15.04	1,219	1,596
48-4	22,856	14,748	48'-0"	14.62	10'-8"	3.25	24'-7"	7.49	583	753
48-5	26,925	18,816	48'-0"	14.62	13'-4"	4.06	27'-3"	8.31	686	889
48-6	30,993	22,885	48'-0"	14.62	16'-0"	4.88	29'-11"	9.12	789	1,025
48-7	35,062	26,953	48'-0"	14.62	18'-8"	5.69	32'-7"	9.93	892	1,161
48-8	39,130	31,022	48'-0"	14.62	21'-4"	6.51	35'-3"	10.74	995	1,297
48-9	43,198	35,090	48'-0"	14.62	24'-0"	7.32	37'-11"	11.56	1,098	1,433
48-10	47,267	39,159	48'-0"	14.62	26'-8"	8.13	40'-7"	12.37	1,201	1,569
48-11	51,335	43,227	48'-0"	14.62	29'-4"	8.94	43'-3"	13.18	1,304	1,705
48-12	55,404	47,296	48'-0"	14.62	32'-0"	9.75	45'-11"	13.99	1,407	1,841
48-13	59,472	51,364	48'-0"	14.62	34'-8"	10.57	48'-7"	14.81	1,510	1,977
48-14	63,541	55,432	48'-0"	14.62	37'-4"	11.38	51'-3"	15.62	1,613	2,112
54-4	29,949	18,666	54'-0"	16.45	10'-8"	3.25	26'-0"	7.92	758	997
54-5	35,098	23,815	54'-0"	16.45	13'-4"	4.06	28'-8"	8.74	889	1,168
54-6	40,247	28,964	54'-0"	16.45	16'-0"	4.88	31'-4"	9.55	1,020	1,339
54-7	45,396	34,113	54'-0"	16.45	18'-8"	5.69	34'-0"	10.36	1,151	1,510
54-8	50,545	39,262	54'-0"	16.45	21'-4"	6.51	36'-8"	11.18	1,282	1,681
54-9	55,694	44,411	54'-0"	16.45	24'-0"	7.32	39'-4"	11.99	1,413	1,852
54-10	60,843	49,560	54'-0"	16.45	26'-8"	8.13	42'-0"	12.81	1,544	2,023
54-11	65,992	54,709	54'-0"	16.45	29'-4"	8.94	44'-8"	13.61	1,675	2,194
54-12	71,142	59,858	54'-0"	16.45	32'-0"	9.75	47'-4"	14.43	1,806	2,365
54-13	76,291	65,007	54'-0"	16.45	34'-8"	10.57	50'-0"	15.24	1,937	2,536

STORMOR EZEE-DRY BINS

Adding to your margin of success.


Timing is everything in the grain business—and can sometimes mean the difference between profit and loss. That's why you need a grain storage and drying system that allows you to get your crop out of the field when you're ready—and to preserve grain quality when you need it most.

STORMOR EZEE-Dry is a complete system for drying, cooling and storing grains of many types—and has a record of outstanding performance in the field. Its intelligent design ensures handling ease, reliability and lower drying costs per bushel.



High volume airflow, overhead drying chamber and dump spouts are all designed for quick, efficient drying.


With bin drying capacities of 540 to 2,100 bushels per batch, and normal storage capacities of up to 21,000 bushels, the STORMOR EZEE-Dry system is ideal for adding grain storage and drying capacity to your operation. For even higher capacities, consider our continuous flow model with 24-hour continuous operation and automatically operated dump spouts. ▀

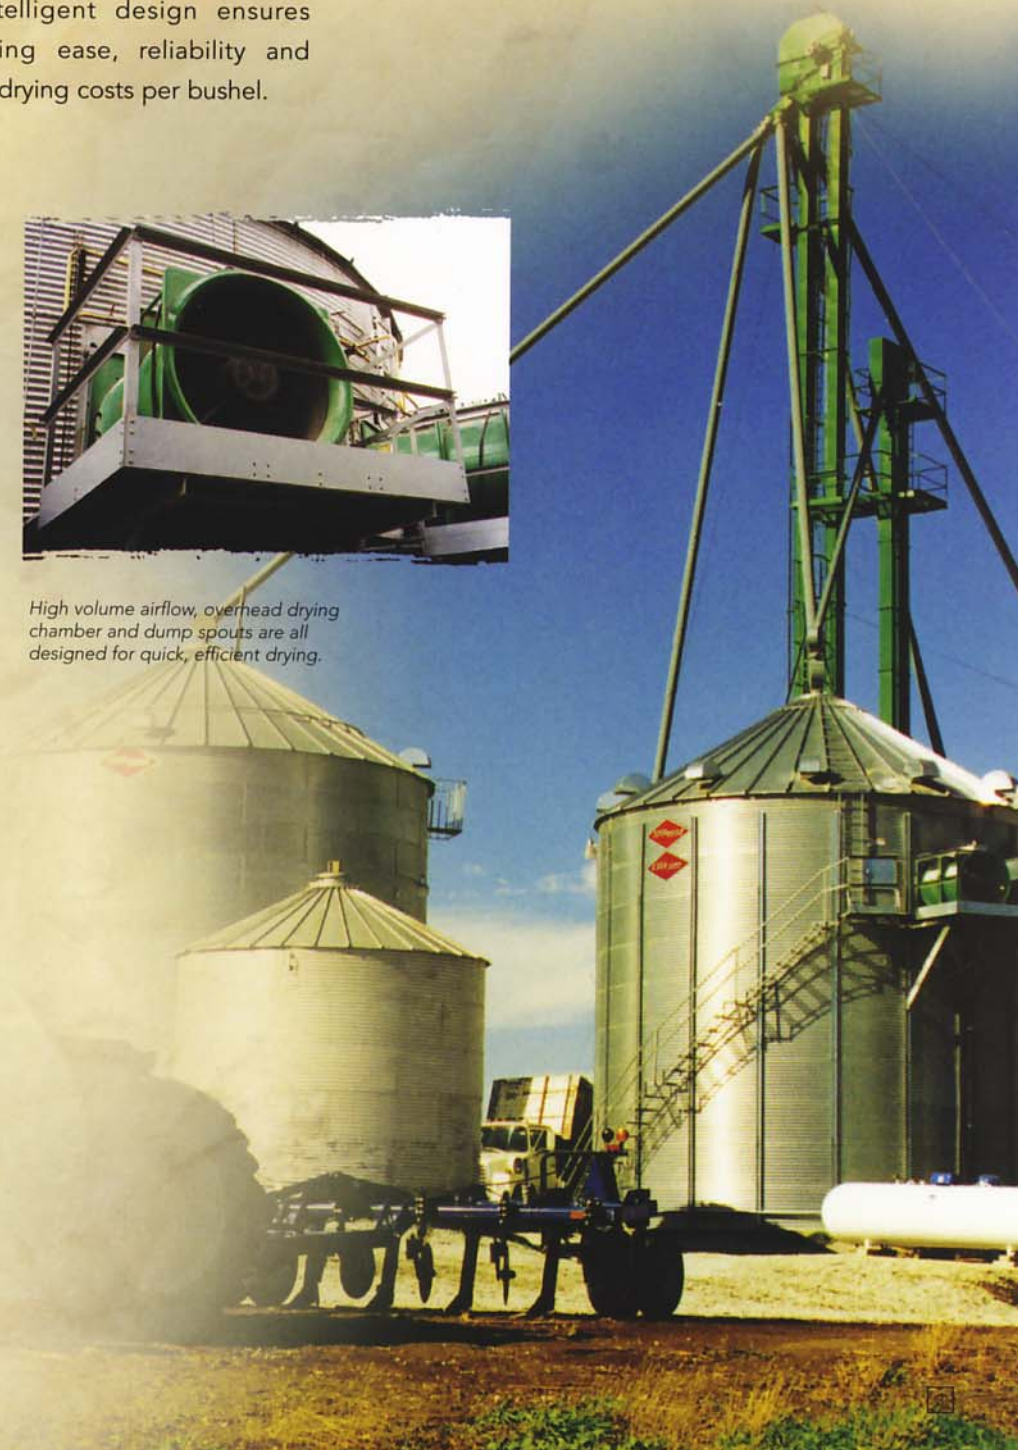

STORMOR EZEE-DRY BIN SPECS

Model	Max Cap (bushels)	Batch Cap (bushels)	Diameter (feet)	Diameter (meters)	Eave Height (feet)	Eave Height (meters)	Overall Height (feet)	Overall Height (meters)	M/Ton Corn Cap
18-7.5	2,820	540	18'-0"	5.48	20'-0"	6.09	25'-2"	7.67	72
18-8.5	3,384	540	18'-0"	5.48	22'-8"	6.91	27'-10"	8.48	86
18-9.5	3,948	540	18'-0"	5.48	25'-4"	7.72	30'-6"	9.29	100
21-7.5	3,853	750	21'-0"	6.41	20'-0"	6.09	26'-2"	7.98	98
21-8.5	4,622	750	21'-0"	6.41	22'-8"	6.91	28'-10"	8.79	117
21-9.5	4,390	750	21'-0"	6.41	25'-4"	7.72	31'-6"	9.61	112
24-7.5	5,054	1,000	24'-0"	7.31	20'-0"	6.09	26'-11"	8.21	128
24-8.5	6,051	1,000	24'-0"	7.31	22'-8"	6.91	29'-7"	9.02	154
24-9.5	7,059	1,000	24'-0"	7.31	25'-4"	7.72	32'-3"	9.83	179
24-10.5	8,061	1,000	24'-0"	7.31	28'-0"	8.53	34'-11"	10.64	205
24-11.5	9,063	1,000	24'-0"	7.31	30'-8"	9.35	37'-7"	11.46	230
27-7.5	6,331	1,200	27'-0"	8.23	20'-0"	6.09	27'-10"	8.48	161
27-8.5	7,600	1,200	27'-0"	8.23	2'-8"	6.91	30'-6"	9.29	193
27-9.5	8,869	1,200	27'-0"	8.23	25'-4"	7.72	33'-2"	10.11	225
27-10.5	10,138	1,200	27'-0"	8.23	28'-0"	8.53	35'-10"	10.92	257
27-11.5	11,407	1,200	27'-0"	8.23	30'-8"	9.35	38'-6"	11.73	290
30-7.5	7,834	1,500	30'-0"	9.14	20'-0"	6.09	28'-9"	8.76	199
30-8.5	9,401	1,500	30'-0"	9.14	22'-8"	6.91	31'-5"	9.58	239
30-9.5	10,968	1,500	30'-0"	9.14	25'-4"	7.72	34'-1"	10.39	279
30-10.5	12,535	1,500	30'-0"	9.14	28'-0"	8.53	36'-9"	11.21	318
30-11.5	14,102	1,500	30'-0"	9.14	30'-8"	9.35	39'-5"	12.01	358
36-7	9,310	2,100	36'-0"	10.97	18'-8"	5.69	29'-7"	9.02	237
36-8	11,598	2,100	36'-0"	10.97	21'-4"	6.51	32'-3"	9.83	295
36-9	13,885	2,100	36'-0"	10.97	24'-0"	7.32	34'-11"	10.64	353
36-10	16,172	2,100	36'-0"	10.97	26'-8"	8.13	37'-7"	11.46	411
36-11	18,459	2,100	36'-0"	10.97	29'-4"	8.94	40'-3"	12.27	469

STORMOR EZEE-Dry is a name that says it all. High volume airflow combines with low static pressure, low temperature drying and low horsepower requirements to dry grain efficiently and safely. This proven overhead drying system requires no spreader, prevents over-drying, and is energy efficient. ■

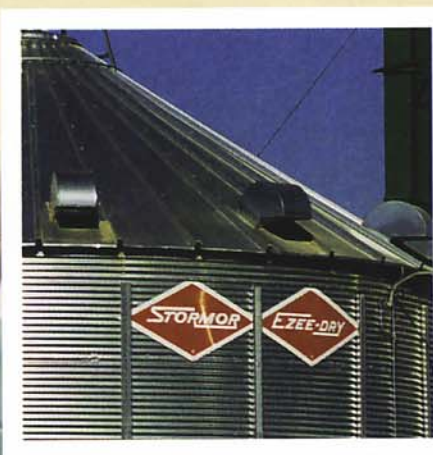

Our STORMOR EZEE-Dry bins are the perfect choice for adding grain storage and drying capacity to your operation.

45° HOPPER BOTTOM SILOS

Convenient handling and versatility.

If your grain storage and handling system requires a hopper bottom bin, you can count on MFS/YORK/STORMOR. Hopper bottom bins pose special challenges in design and construction—and MFS/YORK/STORMOR has the experience to do it right.

These 45° center draw hopper bins are designed for multiple applications—like holding wet grain in front of your dryer or for storing seed or grain. Diameters range from 9' to 21', with capacities of up to 6,000 bushels.

Smart engineering, durable materials and years of field-tested experience combine to give you a hopper bottom bin that will stay on the job for generations to come. ■

Model	Diameter (feet)	Diameter (meters)	Hopper Degree	Max Cap Bushels	Max Cap Cu Ft	Max Cap M/Ton Corn	Overall Height (feet)	Overall Height (meters)	Gate Clearance
492	9'-0"	2.74	45	403	501.4	9.1	14'-6"	4.42	34.5"
493	9'-0"	2.74	45	538	670.3	12.1	17'-2"	5.23	34.5"
494	9'-0"	2.74	45	674	839.2	15.2	20'-2"	6.15	34"
495	9'-0"	2.74	45	810	1,008.10	18.3	22'-10"	6.96	34"
496	9'-0"	2.74	45	946	1,177.00	21.3	25'-6"	7.77	34"
4122	12'-0"	3.66	45	782	973.2	17.7	17'-5"	5.31	34"
4123	12'-0"	3.66	45	1,022	1,271.70	23.1	20'-1"	6.12	34"
4124	12'-0"	3.66	45	1,262	1,570.20	28.5	22'-9"	6.93	34"
4125	12'-0"	3.66	45	1,502	1,868.70	33.9	25'-5"	7.75	34"
4126	12'-0"	3.66	45	1,742	2,167.20	39.3	28'-1"	8.56	34"
4127	12'-0"	3.66	45	1,982	2,465.70	44.7	30'-9"	9.37	34"
4152	15'-0"	4.57	45	1,364	1,693.70	30.8	20'-0"	6.09	34"
4153	15'-0"	4.57	45	1,742	2,163.60	39.3	22'-8"	6.91	34"
4154	15'-0"	4.57	45	2,120	2,633.50	47.8	25'-4"	7.72	34"
4155	15'-0"	4.57	45	2,497	3,103.40	56.3	28'-0"	8.53	34"
4156	15'-0"	4.57	45	2,875	3,573.30	64.9	30'-8"	9.35	34"
4157	15'-0"	4.57	45	3,253	4,043.20	73.4	33'-4"	10.16	34"
4158	15'-0"	4.57	45	3,631	4,513.10	81.9	36'-0"	10.97	34"
4182	18'-0"	5.48	45	2,052	2,552.50	46.4	22'-3"	6.78	34"
4183	18'-0"	5.48	45	2,592	3,224.00	58.5	24'-11"	7.59	34"
4184	18'-0"	5.48	45	3,131	3,895.50	70.7	27'-7"	8.41	34"
4185	18'-0"	5.48	45	3,671	4,567.00	82.8	30'-3"	9.22	34"
4186	18'-0"	5.48	45	4,211	5,238.50	95.1	32'-11"	10.03	34"
4187	18'-0"	5.48	45	4,751	5,910.00	107.3	35'-7"	10.85	34"
4188	18'-0"	5.48	45	5,291	6,581.50	119.4	38'-3"	11.66	34"
4212	21'-0"	6.41	45	3,062	3,809.50	69.1	24'-1"	7.34	34"
4213	21'-0"	6.41	45	3,797	4,723.40	85.7	26'-9"	8.15	34"
4214	21'-0"	6.41	45	4,532	5,637.30	102.3	29'-5"	8.97	34"
4215	21'-0"	6.41	45	5,266	6,551.20	118.9	32'-1"	9.78	34"
4216	21'-0"	6.41	45	6,001	7,465.10	135.5	34'-9"	10.59	34"



HOPPER BOTTOM FEED STORAGE BINS

Durable, trouble-free operation for livestock and poultry producers.

For livestock and poultry producers who want a trouble-free bin that's easy to use and durable, MFS/YORK/STORMOR has what you're looking for. Our hopper bottom feed storage bins are designed with 60° and 67° center draw hoppers for efficient storage, convenient distribution and fast clean out for most types of feed.

Whatever your needs for bin capacity, height or diameter, MFS/YORK/STORMOR has the right feed storage bin for you. And that includes all-galvanized construction, 2.66" corrugation steel, die-formed support legs and cross braces, and ground-controlled roof lid opener on models up to 12' in diameter. Plus our complete line of auger boots with roller gates and valves to control the feed flow. ▣

Model	Diameter (feet)	Diameter (meters)	Hopper Degree	Max Cap Cu Ft	Max Cap US/Ton	Max Cap M/Ton	Overall Height (feet)	Overall Height (meters)	Gate Clearance
161	6'-0"	1.83	60	147.3	2.9	2.6	10'-11"	3.33	34"
162	6'-0"	1.83	60	221.6	4.4	3.9	13'-7"	4.14	34"
163	6'-0"	1.83	60	295.9	5.9	5.3	16'-3"	4.95	34"
164	6'-0"	1.83	60	370.2	7.4	6.7	18'-11"	5.77	34"
771	7'-0"	2.13	67	230.6	4.6	4.2	14'-1"	4.29	34.5"
772	7'-0"	2.13	67	332.2	6.6	5.9	16'-9"	5.11	34.5"
773	7'-0"	2.13	67	433.7	8.7	7.9	19'-5"	5.92	34.5"
774	7'-0"	2.13	67	535.3	10.7	9.7	22'-1"	6.73	34.5"
775	7'-0"	2.13	67	636.8	12.7	11.5	24'-9"	7.54	34.5"
776	7'-0"	2.13	67	738.4	14.8	13.4	27'-5"	8.36	34.5"
692	9'-0"	2.74	60	570.8	11.4	10.3	17'-6"	5.33	34"
693	9'-0"	2.74	60	739.7	14.8	13.4	20'-2"	6.15	34"
694	9'-0"	2.74	60	908.6	18.2	16.5	22'-10"	6.96	34"
695	9'-0"	2.74	60	1,077.50	21.6	19.6	25'-5"	7.75	36"
696	9'-0"	2.74	60	1,246.40	24.9	22.6	28'-1"	8.56	36"
6122	12'-0"	3.66	60	1,123.20	22.4	20.3	21'-5"	6.53	36.5"
6123	12'-0"	3.66	60	1,421.40	28.4	25.8	24'-1"	7.34	36.5"
6124	12'-0"	3.66	60	1,719.60	34.4	31.2	26'-9"	8.15	36.5"
6125	12'-0"	3.66	60	2,017.80	40.3	36.6	29'-5"	8.97	36.5"
6126	12'-0"	3.66	60	2,316.00	46.3	42.1	32'-1"	9.78	36.5"
6127	12'-0"	3.66	60	2,614.20	52.2	47.4	34'-9"	10.59	36.5"
6152	15'-0"	4.57	60	1,955.10	39.1	35.5	24'-5"	7.44	34.5"
6153	15'-0"	4.57	60	2,421.30	48.4	43.9	27'-1"	8.25	34.5"
6154	15'-0"	4.57	60	2,887.60	57.8	52.4	29'-9"	9.07	34.5"
6155	15'-0"	4.57	60	3,353.90	67.1	60.9	32'-5"	9.88	34.5"
6156	15'-0"	4.57	60	3,820.20	76.4	69.3	35'-1"	10.69	34.5"
6157	15'-0"	4.57	60	4,286.40	85.7	77.8	37'-9"	11.51	34.5"

Steep hopper slopes help feed flow smoothly.

FLOORS & FLOOR SUPPORTS

Maximum airflow and strength.

Your grain deserves protection from the bottom up to maintain grain quality and proper airflow. MFS/YORK/STORMOR has the right floor and floor support system to match your needs—and give you the perfect combination of open area and load-bearing strength.

Our galvanized flashing also forms a tight seal between your bin floor and sidewall—and is uniquely designed to minimize spoilage and ensure easy installation. All MFS/YORK/STORMOR floors, floor supports and flashing are built for years of dependable service. ▀



Revolutionary box joint from MFS/YORK/STORMOR locks flooring in place and ensures a flat, tight-fitting surface.

Our proven selection of floor panels and innovative support systems are engineered to match your grain storage needs.



Completing your system—the way you want it.

MFS/YORK/STORMOR delivers the complete package to see that your grain bin and storage system perform the way you want them to. From our complete line of quality fans and heaters for drying and aeration, to durable augers and grain handling equipment you can count on to get the job done the way you want it.

Every piece of grain handling and drying equipment from MFS/YORK/STORMOR is carefully designed and matched to add extra value to your grain storage system. So whether you're loading or unloading, drying, or just waiting for the market to improve, we've got you covered. ▀

Top quality fans and unloading augers round out your grain storage system from MFS/YORK/STORMOR.



Ways to add safety and convenience.

Your MFS/YORK/STORMOR storage system can be customized with a number of accessories to meet your requirements, including:

- Outside ladder and safety cage systems
- Offset ladder platforms
- Inside ladder systems
- Roof stairs and catwalks
- And dozens of other options

Ask your MFS/YORK/STORMOR dealer for more information about these and other options available to you. ▣



Side-step rest platforms provide extra safety and convenience.

Intelligent engineering in every system.

Count on MFS/YORK/STORMOR to design a grain storage and handling system that's right for your operation. Every sidewall fastener and roof panel is computer-designed to ensure optimum performance and ease of installation.

We're experienced at developing systems for a wide variety of geographic locations—from

heavy-duty designs to account for seismic conditions, to coastal installations where salt and moisture must be considered, to areas where high wind conditions are a factor.

The bottom line is this: When it comes to grain handling and storage, we've done just about every type of project possible—and done it well. ▣

More than grain bins—we build grain storage and handling systems.

MFS/YORK/STORMOR has spent decades serving agriculture with virtually every type of grain storage and handling equipment imaginable. And as a division of Global Industries, Inc., our dealer network and family of products continue to grow.

- › MFS/STORMOR commercial grain storage bins
- › YORK bucket elevators
- › Aeration systems
- › Screw conveyors and load-out systems
- › YORK drag conveyors
- › STORMOR EZEE-Dry grain drying systems
- › Brownie leg towers, catwalks and stair units
- › Sentinel all-steel buildings
- › Waste water treatment facilities

A company committed to you.

Headquartered in Grand Island, Nebraska, USA, Global Industries, Inc., is the parent company of MFS/YORK/STORMOR. We are committed to bringing you the highest quality products and the very best customer service in the world.

MFS/YORK/STORMOR is also committed to innovation, and we have the financial strength necessary to continually invest in new technologies and product development. That means you can count on MFS/YORK/STORMOR for grain storage and handling

systems that will serve you for generations to come—and we'll be there to support them.

When you do business with MFS/YORK/STORMOR, you're working with experts in grain handling and storage that are dedicated to your success. ▀



MFS / YORK / STORMOR

A Division of **GLOBAL** Industries, Inc.

Argentina • Thailand • United Kingdom • Ukraine • United States



Corporate Headquarters:

2928 E. Hwy 30 • Grand Island, Nebraska, USA 68801
+1.308.384.9320 • E-mail: sales@mfsyork.com
Fax: +1.308.382.6954 • www.mfsyork.com